


## Photovoltaic module HIT<sup>®</sup> N335K

Panasonic's unique heterojunction technology uses ultra-thin amorphous silicon layers. These thin dual layers reduce losses, resulting in higher energy output than conventional panels.

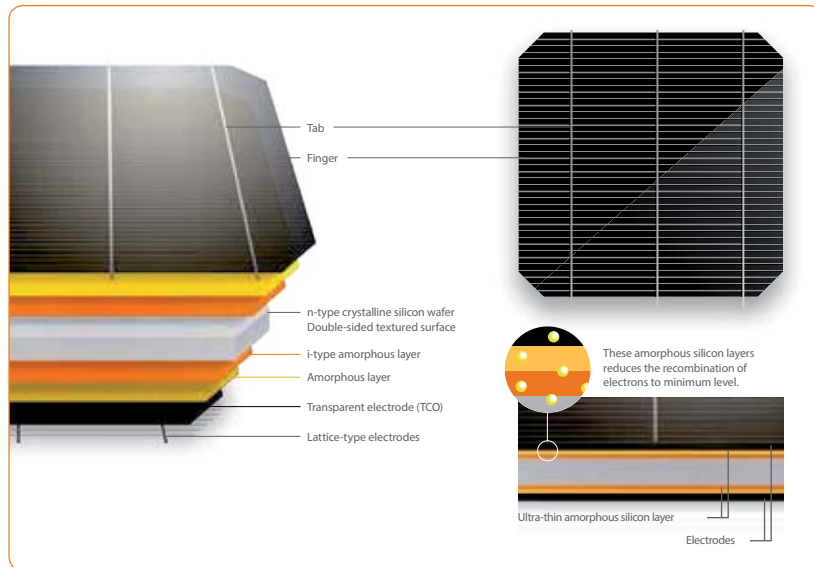

Our powerful Panasonic HIT<sup>®</sup> N335K features a high module efficiency of 20%, an industry leading temperature coefficient of  $-0.258\% / ^\circ\text{C}$  and a sleek design.

**Powerful and efficient, designed to get the most out of your roof!**

### Our competitive advantages



#### High Performance at High Temperatures

As temperature increases, HIT<sup>®</sup> continues to perform at high levels due to the industry leading temperature coefficient of  $-0.258\% / ^\circ\text{C}$ . No other module even comes close to our temperature characteristics. That means more energy throughout the day and particularly in summer.



#### 25 Year Product and Performance Guarantee\*\*

Industry leading 25 year product workmanship and performance guarantee is backed by a century old company - Panasonic. Power output is guaranteed to 86.2% after 25 years.



#### Quality and Reliability

Panasonic's vertical integration, over 20 years of experience manufacturing HIT<sup>®</sup> and 20 internal tests 3-times beyond those mandated by current standards provide extreme quality assurance.



Higher efficiency (of 20%) through improved cells  
The HIT+ cells boast an even cleaner junction between the layers of the cells. The cells are manufactured in Japan and offer you an even higher efficiency than the before.



#### Low Degradation

HIT "N-type" cells result in extremely Low Light Induced Degradation (LID) and zero Potential Induced Degradation (PID) which supports reliability and longevity. This technology reduces annual degradation, guaranteeing more power for the long haul.



#### Enhanced Frame Design


A 40mm frame increases durability and strength, being able to handle loads of up to 5400Pa.  
Also, the water drainage system gives rain water and snow melt a place to go, reducing water stains and soiling. Less dirt on the module means more sunlight getting through to generate power.

**Photovoltaic module HIT® N335K**

**ELECTRICAL SPECIFICATIONS**

Model	VBHN335KJ01
Maximum Power (Pmax) <sup>1</sup>	335W
Maximum Power Voltage (Vpm)	59.9V
Maximum Power Current (Ipm)	5.60A
Open Circuit Voltage (Voc)	71.5V
Short Circuit Current (Isc)	6.05A
Max. Power at NOCT (Normal Operating Conditions)	251.9W
Temperature Coefficient (Pmax)	-0.258%/°C
Temperature Coefficient (Voc)	-0.164V/°C
Temperature Coefficient (Isc)	3.34mA/°C
NOCT	44.0°C
Module Efficiency	19.7%
Maximum System Voltage	1000V
Series Fuse Rating	15A
Power Tolerance [-/+]	+10%/ 0%*


**LINEAR PERFORMANCE GUARANTEE**

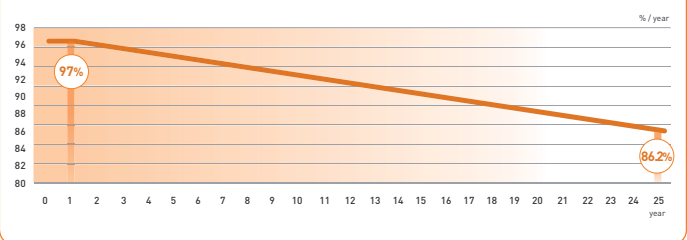

**MECHANICAL SPECIFICATIONS**

Model	VBHN335KJ01
Internal Bypass Diodes	4 Bypass Diodes
Module Area	1.67m <sup>2</sup>
Weight	19kg
Dimensions LxWxH	1590mm x 1053mm x 40 mm
Cable Length +Male/-Female	1020mm/1020 mm
Cable Size / Type	No. 12 AWG / PV Cable
Connector Type	SMK
Static Wind / Snow Load	5400 Pa
Pallet Dimensions LxWxH	1618mm x 1071mm x 2356mm (double stack)
Quantity per Pallet / Pallet Weight	48 pcs. (2x24 pcs.) (960 kg)
Quantity per 40' Container	672 pcs.

**DIMENSIONS**

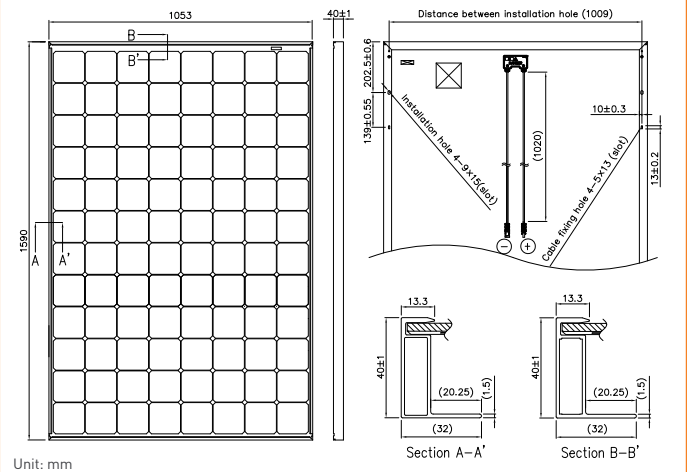


**OPERATING CONDITIONS & SAFETY RATINGS**

Model	VBHN335KJ01
Operating Temperature	-40°C to 85°C
Safety & Rating Certifications	IEC61215, IEC61730-1, IEC1730-2
Fire Classification	Class II
Limited Guarantee	25** years workmanship and power output (linear)***

**NOTE:** Standard Test Conditions: Air mass 1.5; irradiance = 1000W/m<sup>2</sup>; cell temp. 25°C  
<sup>\*</sup> Maximum power at delivery. For guarantee conditions, please check our guarantee document.  
<sup>\*\*</sup> Registration necessary on [www.eu-solar.panasonic.net](http://www.eu-solar.panasonic.net), otherwise 15 years apply based on guarantee document].  
<sup>\*\*\*</sup> 1st year 97 %, from 2nd year -0.45 %/year, in 25th year 86.2%.  
<sup>1</sup> STC: Cell temp. 25°C, AM1.5, 1000W/m<sup>2</sup>

**NOTE:** Specifications and information above may change without notice.

**DEPENDENCE ON IRRADIANCE**

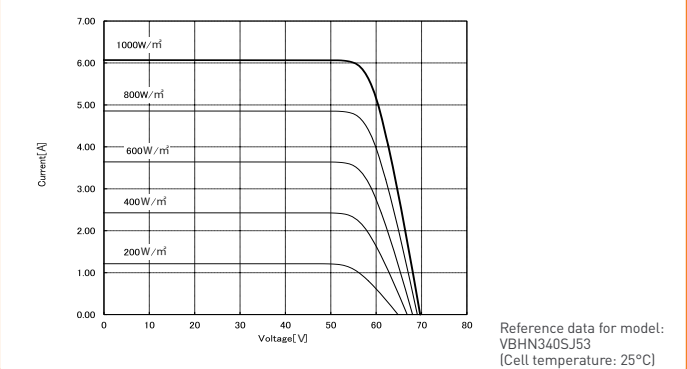

**CERTIFICATES**

**CLASS II**  
By TÜV Rheinland  
UNI 8457  
UNI 9174  
UNI 9177

IEC61215  
IEC61730-1  
IEC61730-2

JET  
www.jet.or.jp

RoHS COMPLIANT

APPROVED PRODUCT  
California, NEC Edition  
Panasonic Solar

Electrical Protection Class II

CE

**CAUTION!** Please read the installation manual carefully before using the products.

Used electrical and electronic products must not be mixed with general household waste. For proper treatment, recovery and recycling of old products, please take them to applicable collection points in accordance with your national legislation.

