

OPzV bloc solar.power

Valve regulated lead-acid batteries for cyclic applications



Motive Power Systems

Reserve Power Systems

Special Power Systems

Service

Your benefits with HOPPECKE OPzV bloc solar.power

- **Maintenance-free regarding water refilling** - due to innovative Gel-technology
- **Very high cycle stability during PSoC¹ operation** - due to tubular plate design with efficient charge current acceptance
- **Maximum compatibility** - dimensions according to DIN 40744
- **Easy assembly and installation** - battery lid with integral handle
- **Higher short-circuit safety even during the installation** - based on HOPPECKE system connectors



Similar to the illustration

Typical applications of HOPPECKE OPzV bloc solar.power

- **Solar/Off-grid and Leisure Applications**
Isolated holiday homes, cottages, alpine huts
- **Storage for direct consumption of photovoltaic (PV) energy**
- **Traffic systems**
Signalling systems
Lighting
- **Telecommunications**
Mobile phone stations
BTS-stations
Off-grid/on-grid solutions




HOPPECKE

POWER FROM INNOVATION

Type overview

Capacities, dimensions and weights


Type	C ₁₀₀ /1.85 V Ah	C ₅₀ /1.85 V Ah	C ₂₄ /1.83 V Ah	C ₁₀ /1.80 V Ah	C ₅ /1.77 V Ah	Max. Weight kg	max.* Length L mm	max.* Width W mm	max.* Height H mm	Fig.
12V 1 OPzV bloc solar.power 70	70.0	65.0	57.6	51.0	45.0	40.0	272	205	383	A
12V 2 OPzV bloc solar.power 120	130.0	125.0	117.6	103.0	90.5	52.5	272	205	383	A
12V 3 OPzV bloc solar.power 180	200.0	190.0	175.2	154.0	135.5	75.5	380	205	383	A
6V 4 OPzV bloc solar.power 250	270.0	250.0	235.2	205.0	181.0	51.0	272	205	383	B
6V 5 OPzV bloc solar.power 300	330.0	315.0	292.8	250.0	226.0	66.0	380	205	383	B
6V 6 OPzV bloc solar.power 370	400.0	375.0	350.4	308.0	271.5	73.0	380	205	383	B

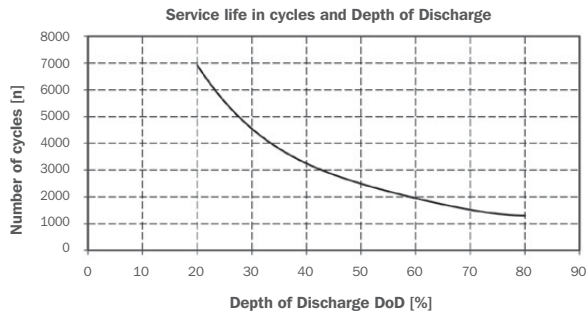

C₁₀₀, C₅₀, C₂₄, C₁₀ and C₅ = Capacity at 100 h, 50 h, 24 h, 10 h and 5 h discharge


* according to DIN 40744 data to be understood as maximum values

Fig. A

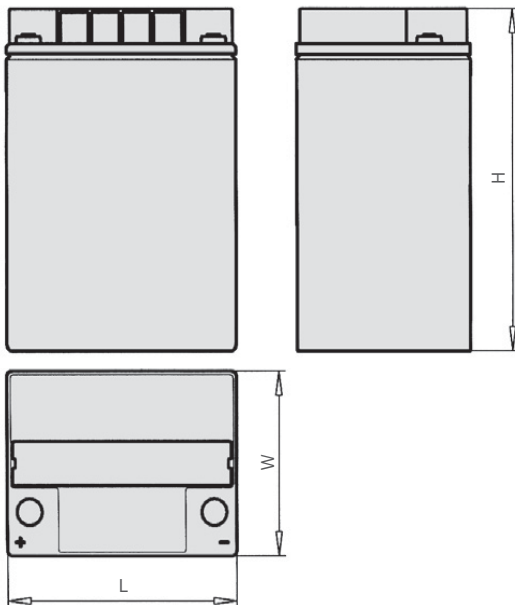

12 V 1 OPzV bloc solar.power 70 - 12 V 3 OPzV bloc solar.power 180

Fig. B

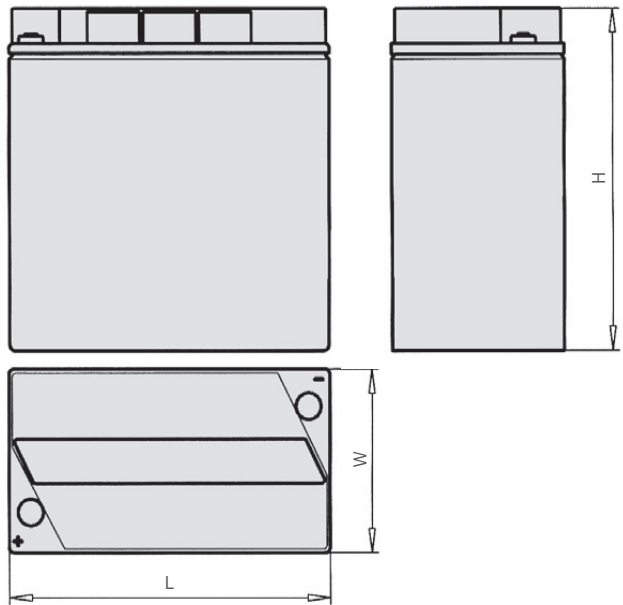

6 V 4 OPzV bloc solar.power 250 - 6 V 6 OPzV bloc solar.power 370

Optimal environmental compatibility - closed loop for recovery of materials in an accredited recycling system

IEC 60896-21
IEC 61427

‡ Partial State of Charge