

Renewable Energy

NEXT GENERATION BATTERIES



Rolls




SOLAR SERIES • Flooded & AGM Range

ROLLS SOLAR SERIES 4000 - TECHNICAL SPECIFICATIONS

Series 4000 (7 year warranty)



Cycle Life - 4000

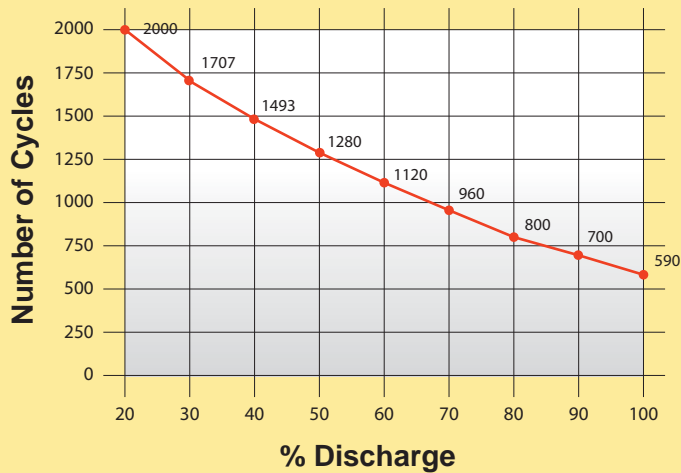

Unsurpassed cycling service
10 year average life expectancy!

Part No.	Capacity in Ah at			Dimensions (mm) Length x Width x Height	Weight Dry (Kg)	Weight Wet (Kg)
	C100	C20	C10			
Series 4000 - 2Volt (1 Cell) - Polypropylene Container						
S1380	1380	1050	893	340 x 181 x 432	37	52
S1590	1596	1200	1020	340 x 181 x 432	39	55
S1725	1729	1300	1105	340 x 181 x 432	42	57
Series 4000 - 6Volt (3 Cell) - Polypropylene Container						
S460	466	350	298	318 x 181 x 426	35	49
S530	532	400	340	318 x 181 x 426	41	53
S600	600	450	383	318 x 181 x 426	44	55
Series 4000 - 12Volt (6 Cell) - Polypropylene Container						
24HT 80	106	80	68	279 x 171 x 241	17	23
30H 125	166	125	106	345 x 171 x 248	27	34
T12 136	181	136	116	345 x 171 x 286	33	41
T12 250	266	200	170	391 x 178 x 365	44	57

SOLAR SERIES 4000 Features & Benefits

- Coupling of our thick plate design with highest density active material
- Enveloped separators
- Increased liquid reserve
- Greater durability
- Sediment chamber removed allowing higher plates to be used in the same sized cell, thus yielding greater capacity
- Unsurpassed cycling service, 7 year warranty - 10 year average life expectancy!
- Less maintenance

Recombiner Cap:

- Drastically reduce the amount of time and money you spend on "topping up" your batteries.
- Virtually eliminate the risk that venting of hydrogen gas can cause
- Contain corrosive elements - which increase the life of your battery and decrease cleaning time
- Provide the user with all the benefits of a flooded type battery with minimal maintenance similar to sealed batteries
- Increases watering intervals by three times. This can be as long as 12 months



ROLLS SOLAR SERIES 000 - TECHNICAL SPECIFICATIONS

Part No.	Capacity in Ah at			Dimensions (mm) Length x Width x Height	Weight Dry (Kg)	Weight Wet (Kg)
	C100	C20	C10			
Series 5000 - 2Volt (1 Cell) - Dual Container						
2 KS 33P	2490	1766	1466	392 x 211 x 630	66	94
2 YS 31P	3426	2430	2017	394 x 229 x 803	91	129
Series 5000 - 4Volt (2 Cell) - Dual Container						
4 CS 17P	770	546	453	365 x 210 x 464	44	58
4 KS 21P	1557	1104	916	400 x 238 x 629	98	121
4 KS 25P	1904	1350	1121	400 x 270 x 629	100	143
Series 5000 - 6Volt (3 Cell) - Dual Container						
6 CS 17P	770	546	453	559 x 210 x 464	81	100
6 CS 21P	963	683	567	559 x 248 x 464	98	123
6 CS 25P	1156	820	681	559 x 286 x 464	115	144
Series 5000 - 12Volt (6 Cell) - Dual Container						
12 CS 11P	503	357	296	559 x 286 x 464	100	123




Series 000
(0 year warranty)

SOLAR SERIES 000 Features & Benefits

- Dual container modular construction
- Coupling of our thick plate design with highest density active material
- Enveloped separators
- Increased liquid reserve
- Elimination of "Stray" current
- No acid leakage
- Easy "on-site" assembly/disassembly (no special tools or skills required)
- Significantly less connections, eliminating many points of failure, thus increasing charging efficiency
- Sediment chamber removed allowing higher plates to be used in the same sized cell, thus yielding greater capacity
- Unsurpassed cycling service, 10 year warranty - 15 years average life expectancy!
- Less maintenance
- Link leads, terminal covers

Cycle Life - 000

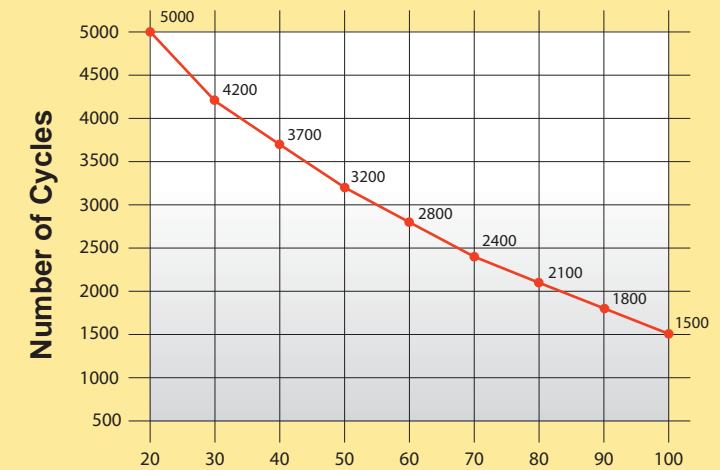

Unsurpassed cycling service
15 year average life expectancy!

Range available See Reference or Details


ROLLS SOLAR A SERIES - TECHNICAL SPECIFICATIONS

Part No.	Capacity in Ah at			Terminal Type	Dimensions (mm) Length x Width x Height	Weight (Kg)
	C100	C20	C10			
AGM Series - 6Volt Deep Cycle						
S6-275AGM	275	250	229	M8-TP08	262 x 181 x 273	35
S6-370AGM	370	335	300	DT	295 x 178 x 366	48
S6-460AGM	460	415	374	DT	295 x 178 x 424	56
AGM Series - 12Volt Deep Cycle						
S12-95AGM	94	85	77	M8-TP08	260 x 169 x 237	25
S12-116AGM	116	105	95	M8-TP08	307 x 169 x 233	30
S12-128AGM	128	115	104	M8-TP08	328 x 172 x 236	33
S12-160AGM	161	145	131	M8-TP08	341 x 173 x 309	44
S12-230AGM	231	210	189	LT	530 x 209 x 218	61
S12-240AGM	237	215	193	DT	381 x 178 x 371	60
S12-290AGM	290	260	234	LT	521 x 269 x 224	78
AGM Series - 2Volt Deep Cycle						
S2-590AGM	590	550	500	M8	241 x 172 x 365	32
S2-945AGM	945	880	800	M8	414 x 175 x 365	54
S2-1180AGM	1180	1100	1000	M8	474 x 175 x 365	64
S2-1275AGM	1275	1200	1150	DT	295 x 178 x 424	58
S2-1895AGM	1895	1750	1600	M8	401 x 347 x 378	104
S2-2375AGM	2375	2200	2000	M8	490 x 349 x 382	130
S2-3560AGM	3560	3300	3000	M8	711 x 353 x 382	196

Series (year warranty)



Cycle Life s e t f i s c a r e

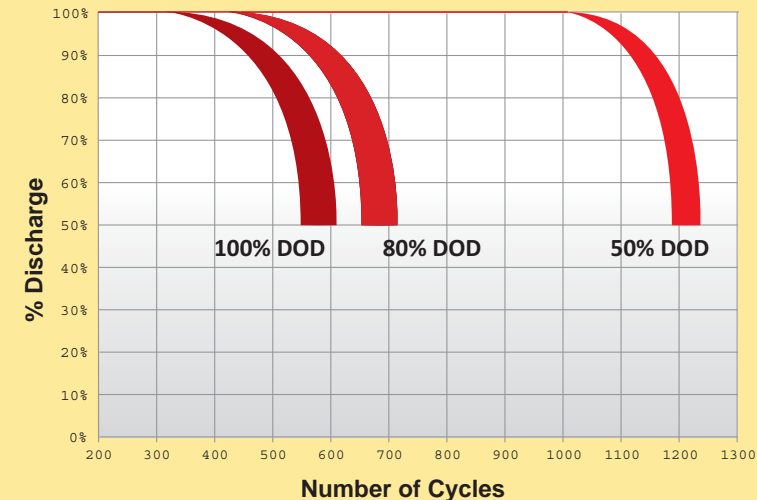

Rolls ee Cycle A Series

- | | | |
|---------------------------------|---|---|
| Features: | | enefits: |
| Sealed construction | ➔ | aintenance-free, spill proof, non hazardous |
| igh density paste | ➔ | igh capacity and long life |
| heavy duty thick grids | ➔ | roved deep cycle construction |
| St case and cover | ➔ | ugged construction, shock and vibration resistant |
| Low internal resistance | ➔ | aster recharge time |
| microporous glass mat separator | ➔ | Enhanced electrolyte retention maximises capacity |
| available in all standard sizes | ➔ | meets all application requirements |

CAPENERGIE
 Mas d'alhem - 34150 - La Boissière - France
 Tél : 04 67 56 77 91 - Fax : 04 67 55 52 25
 E-Mail : info@capenergie.fr
 www.capenergie.fr

