



# SolarEdge Single Phase StorEdge Inverter for Europe, APAC & South Africa

SE5000-RWS / SE5000-ZAS / SE6000-RWS / SE6000-ZAS



STOREDGE™

## Ideal for battery storage and backup power

- **Supports StorEdge Solution Applications** - reduce electric bills with maximised self-consumption and profile programming
- **Provides Backup Power** - StorEdge Inverter includes the hardware required for automatically supplying power to backed-up loads in the event of grid outages
- **Simple Design and Installation** - single inverter for managing PV production, battery storage and backup power
- **Enhanced Safety** - designed to eliminate high voltage during installation, maintenance or firefighting
- **Full Visibility** - built-in monitoring of battery status, PV production, remaining backup power, and self-consumption data
- **Easy Maintenance** - remote access to inverter software



# SolarEdge Single Phase StorEdge Inverter for Europe, APAC & South Africa

SE5000-RWS / SE5000-ZAS / SE6000-RWS / SE6000-ZAS

	SE5000-xxS	SE6000-xxS	
<b>OUTPUT - AC (LOADS/GRID)</b>			
Rated AC Power Output	5000 <sup>(1)</sup>	6000	VA
Max AC Power Output	5000 <sup>(1)</sup>	6000	VA
AC Output Voltage (Nominal)	220 / 230		Vac
AC Output Voltage Range	184 - 264.5		Vac
AC Frequency	50 / 60 ± 5		Hz
Maximum Continuous Output Current	27		A
Residual Current Detector / Residual Current Step Detector	300 / 30		mA
Utility Monitoring, Islanding Protection, Country Configurable Thresholds	Yes		
Charge Battery from AC (if Allowed)	Yes		
THD	<5		%
Power factor with rated power	>0.99 (configurable; 0.9 leading to 0.9 lagging)		
Typical Nighttime Power Consumption	<5		W
<b>OUTPUT - AC (BACKUP POWER)<sup>(2)</sup></b>			
Rated AC Power Output	5000 <sup>(3)</sup>		VA
Max AC Power Output - Surge	7300		VA
AC Output Voltage (Nominal)	220 / 230		Vac
AC Output Voltage Range	184 - 264.5		Vac
AC Frequency	50 / 60 ± 5		Hz
Maximum Continuous Output Current	22		A
AC Breaker	Yes		
THD	<3		%
Power factor with rated power	0.2 leading to 0.2 lagging		
Automatic switchover time	<2		sec
Typical Nighttime Power Consumption	<5		W
<b>INPUT - DC (PV and BATTERY)</b>			
Transformer-less, Ungrounded	Yes		
Max Input Voltage	500		Vdc
Nom DC Input Voltage	400		Vdc
Reverse-Polarity Protection	Yes		
Ground-Fault Isolation Detection	600kΩ Sensitivity		
Maximum Inverter Efficiency	97.6		%
European Weighted Efficiency	97.4		%
<b>INPUT - DC (PV)</b>			
Maximum DC Power (STC)	6750	8100	W
Max Input Current <sup>(4)</sup>	19.5	23	Adc
2-pole Disconnection	Yes		
<b>INPUT - DC (BATTERY)</b>			
Continuous Peak Power	3300		W
Number of Batteries per Inverter <sup>(4)</sup>	Up to 2, for double capacity		
Max Input Current	8.5		Adc
2-pole Disconnection	Yes		
DC Fuses on Plus and Minus	12A (field replaceable)		
<b>ADDITIONAL FEATURES</b>			
Supported Communication Interfaces	RS485 for battery, RS485, Ethernet, ZigBee (optional), Wi-Fi (optional)		
Battery Power Supply	Yes, 12V / 53W		
Integrated AC, DC and Communication Connection Unit	Yes		
AC Disconnect	Yes		
Manual Inverter Bypass Switch	Yes		
DC Voltage Rapid Shutdown (PV and Battery)	Yes, according to VDE 2100-712 (pending)		

<sup>(1)</sup> Limited to 4600VA when inverter is set to South Africa

<sup>(2)</sup> Not designed for standalone applications and requires AC for commissioning

<sup>(3)</sup> The rated AC power output is the minimum between 5000VA and the battery continuous peak power

<sup>(4)</sup> For two batteries for double power contact SolarEdge technical support



# SolarEdge Single Phase StorEdge Inverter for Europe, APAC & South Africa

SE5000-RWS / SE5000-ZAS / SE6000-RWS / SE6000-ZAS

STANDARD COMPLIANCE (PENDING)		
Safety	IEC-62103 (EN50178), IEC-62109	
Grid Connection Standards <sup>(5)</sup>	VDE 0126-1-1, NRS 097-2-1, AS4777	
Emissions	IEC61000-6-2, IEC61000-6-3, IEC61000-3-11, IEC61000-3-12	
INSTALLATION SPECIFICATIONS		
AC Output (Loads/Grid) gland cable diameter / wire cross section	9-16mm / 2-14mm <sup>2</sup>	
AC Output (Backup) gland cable diameter / wire cross section	9-16mm / 2-14mm <sup>2</sup>	
DC Input (PV)	2 MC4 pairs	
DC Input (Battery)	1 MC4 pair	
Dimensions with Connection Unit (HxWxD)	962 x 315 x 184	mm
Weight with Connection Unit	26.5	kg
Cooling	Natural convection and internal fan (user replaceable)	
Noise	<50	dB(A)
Min - Max Operating Temperature	-20 to +60 <sup>(6)</sup>	
Protection Rating	IP65 - Outdoor and Indoor	

<sup>(5)</sup> For all standards refer to Certifications category in Downloads page: <http://www.solaredge.com/groups/support/downloads>


<sup>(6)</sup> Power derating from 50 °C



# SolarEdge Single Phase StorEdge Inverter for Europe, APAC & South Africa

SE5000-RWS / SE5000-ZAS / SE6000-RWS / SE6000-ZAS

## StorEdge Solution with Backup Power

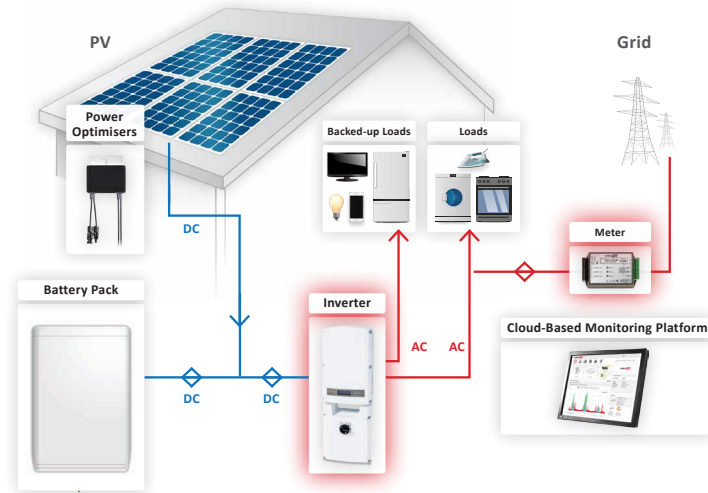

### Supported batteries

